



# CORNER CHAIN SAW CSF-50

CUTTING DEPTH OF UP TO 500 MM

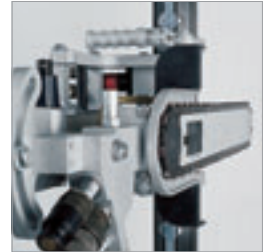

Cutting flush with the wall and non-overlapping corners

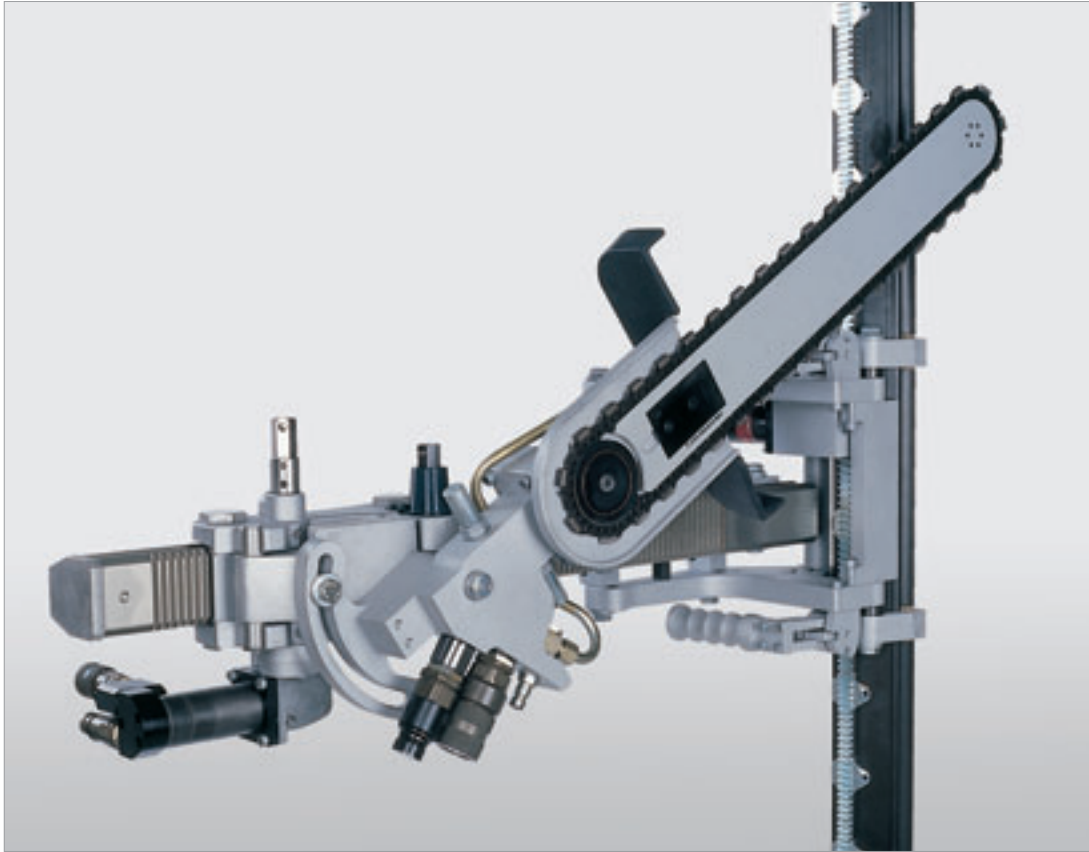

Quick installation on Tyrolit Hydrostress standard rails



Simple handling thanks to quick release fitting

- Can be used directly for corner cutting on the existing VAS or VS rail system
- Dispensing with overlaps saves time and money
- Also ideal for small openings due to time-saving, user-friendly handling
- Robust chain with long service life due to being equipped with O-ring chain
- Modular use due to existing hydraulic drive
- Fully automatic operation thanks to standard feed motors for swivelling and travelling motion

## Technical data

BAR	
Cutting depth	500 mm
Width	4.8 mm

WEIGHT	
Saw head with chain	12 kg
Chassis	22 kg

## System & accessories

CORNER SAW CSF50	
10979669	Corner Saw CSF50 Premium
	incl. diamond chain, spare chain, carry case and service kit

ACCESSORIES	
10977643	Chain bar 20"/50cm
10977642	Concrete O-ring diamond chain 20"
10978001	Universal O-ring diamond chain 20"
10978610	Chain bar CSF61 24"/60 cm
10978609	Diamond chain with double pumper 49 Seg.
963204	Service kit CSF50
961584	Bar repair kit (chain sprocket) CSF50
962776	Spare drive wheel
975061	Chain spray