


WALL SAW EX


CUTTING DEPTHS UP TO 320 MM



Controller for 16 and 32 A operation. Light and easy to transport - weighs just 19 kg

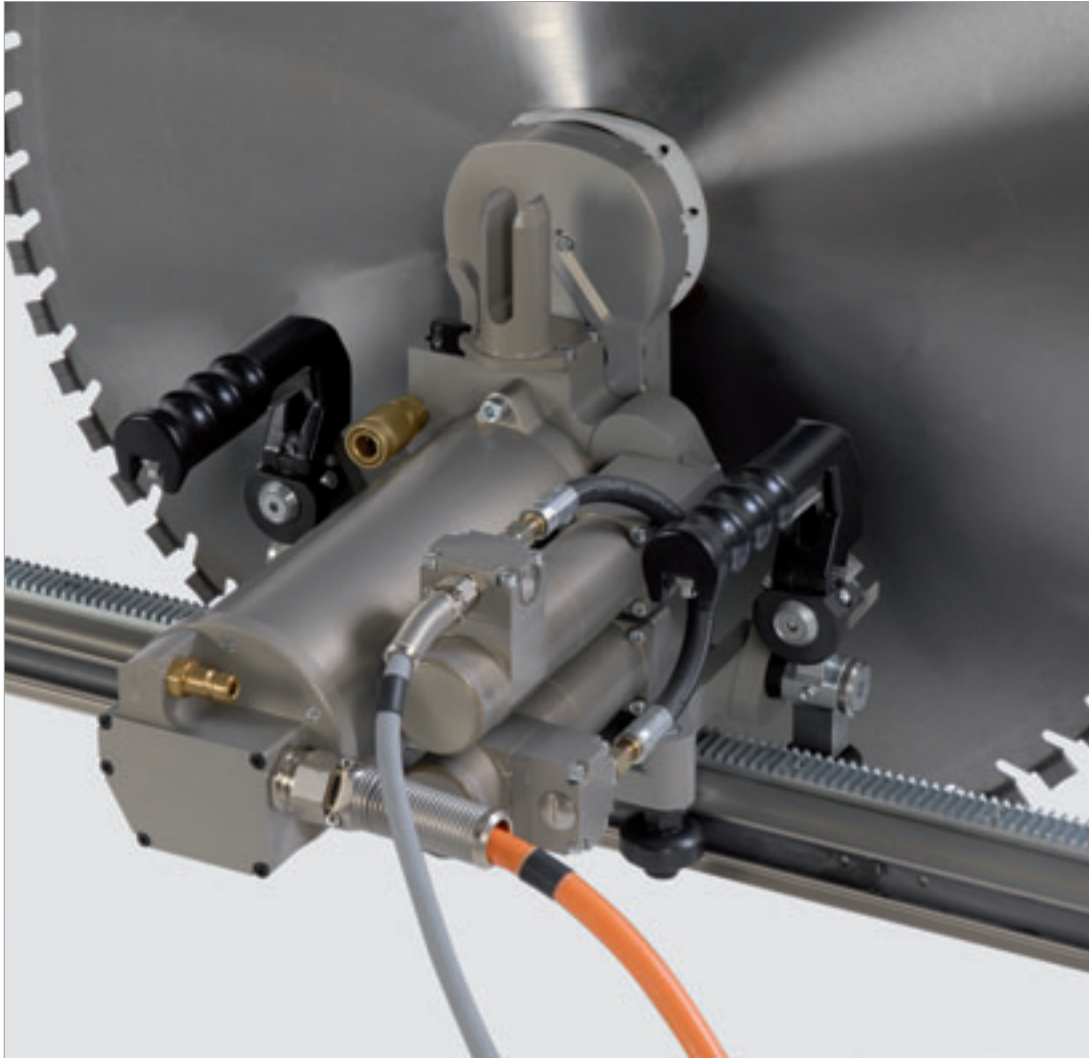

All functions controllable via remote control unit

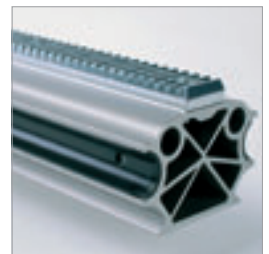

Lightweight aluminium rail with guide inserts and tothing made from steel. 5.5 kg / 1.1 m

- 11 kW of power with overall weight of just 26 kg thanks to ergonomic design
- Different blade diameters can be used, max. 750 mm
- Optimum cutting speed due to integrated automatic feed mechanism
- Suitable for floor cutting and flush cutting due to the adjustable saw head (50 mm)
- Useful for quick, easy door and window cutting thanks to rail system with rotating rail support



Quick and handy ALL-IN-ONE blade guard for corner, flush and normal cutting

TYROLIT

Technical data

SAW BLADE	
Max. cutting depth	320 mm
Max. saw blade Ø	750 mm
Free detachable up to Ø	625 mm
Blade flange mounting	fixed
Saw blade fixing (flush cuts)	6 countersunk head screws, 90 mm graduated circle

ELECTRIC MOTOR	
Water-cooled high-frequency motor	
Output at 16 A	8 kW
Output at 32 A	11 kW

CONTROL UNIT	
Voltage	400 V
Frequency	50 Hz / 60 Hz
Weight	19.5 kg

WEIGHT	
incl. drive motor and 2 feed motors	26 kg
with 2 feed motors only	11.8 kg

System & accessories

WALL SAW SYSTEM EX	
10980700	Wall saw EX incl. feed motors
10978650	Electric main drive motor EX / 400V / 50Hz
10980800	Electric control unit EX - 400V/50Hz
10979519	Remote control EX
10981778	Transport trolley EX
10980155	Blade guard 750 EX (all-in-one)
10978640	Track EX - 1100 mm
10978879	Track EX - 2200 mm
10980156	Rotary rail support EX
10980156	Rotary rail support EX
10980156	Rotary rail support EX
10980347	Tool box

ACCESSORIES	
10982508	Radio remote control EX
10981196	Track EX - 800 mm
10978640	Track EX - 1100 mm
10978879	Track EX - 2200 mm
10980260	Track connector for track
10980156	Rotary rail support EX
10983408	Swivel-stairs track foot EX